


PNEUMATIC STRAPPING TOOL WITH FRICTION WELD SEAL FOR PLASTIC PP / PET STRAP — FLAT AND ROUND SURFACES

TECHNICAL DATA / APPLICATIONS :

Compact, easy to use and versatile strapping tool to use in medium / heavy duty industrial applications. Available standard in two strap sizes: 16mm(5/8") and 19mm(3/4"). On request can be provided for 13mm(1/2") strap size with clutch system. The clutch system allows adjustment of the strap tension and is also available, on request, for the other sizes. — write this option on the order —

Package type	Flat, round surface (min. diam. 700mm—28") Opt.: round package base kit (min. D. 500mm-20")
Strap quality	PP / PET
Strap width	From 13mm up to 19mm (1/2" - 3/4")
Strap thickness	From 0,6mm up to 1.27mm (0.024" - 0.05")
Max. Tension	3500N
Air pressure and consumption	From 5,5 up to 6,5 bar MAX / 9 l/s (14 l/s welding)
Max. Tension speed	9 mt/min
Joint type	Friction weld seal
Weight	Around 5,2 Kg
Order code Poli MT13	115.130.710 with clutch
Order code Poli MT16	115.160.710
Order code Poli MT19	115.190.710

- **ERGONOMIC**
- **MODERN DESIGN**
- **COMPACT AND LIGHT**
- **NEW BOSCH WELDING MOTOR**
- **INSERT BOTH STRAPS TOGETHER**
- **EASY TO REMOVE THE TOOL**

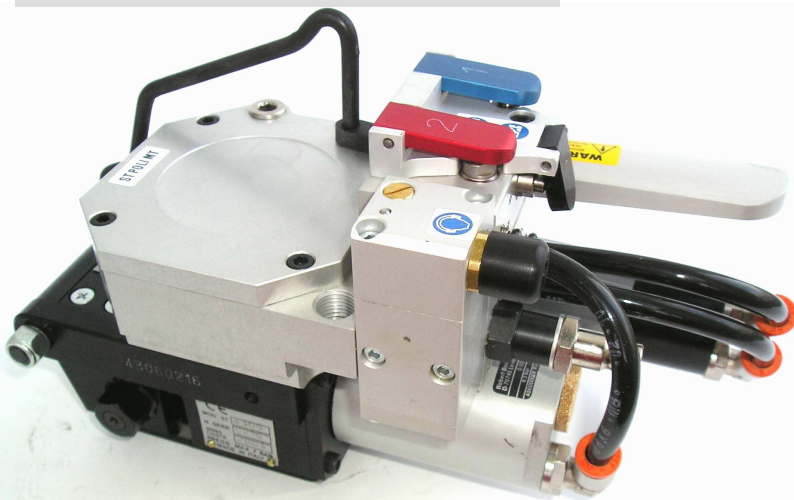

- **AN OPTIONAL CLUTCH SYSTEM IS AVAILABLE FOR VARIABLE STRAP TENSION**
- **NEW LOCK TENSION STRAP**
- **ON REQUEST UPPER AIR CONNECTION CONFIGURATION**


PNEUMATIC STRAPPING TOOL WITH FRICTION WELD SEAL FOR PLASTIC PET STRAP — FLAT AND ROUND SURFACES

TECHNICAL DATA / APPLICATIONS :

Powerfull, compact and easy to use strapping tool to use in heavy duty industrial applications especially with high quality PET Polyester strapping. Available standard in two strap sizes: 16mm (5/8") and 19mm (3/4").

Package type	Flat, Round surface (min.Diam. 700mm– 28")
Strap quality	PET
Strap width	From 16mm up to 19mm (5/8" - 3/4")
Strap thickness	From 0,8mm up to 1.27mm (0.031" - 0.05")
Max. Tension	4000N (16mm) - 5000N (19 mm)
Air pressure and consumption	From 5,5 up to 6,5 bar MAX / 12 l/s (14 l/s welding)
Max. Tension speed	Around 6 mt/min
Joint type	Friction weld seal
Weight	Around 5,3 Kg
Order code Poli HT16	110.160.630
Order code Poli HT19	110.190.630

- **ERGONOMIC**
- **MODERN DESIGN**
- **COMPACT AND LIGHT**
- **NEW BOSCH MOTORS**
- **INSERT BOTH STRAPS TOGETHER**
- **EASY TO REMOVE THE TOOL**

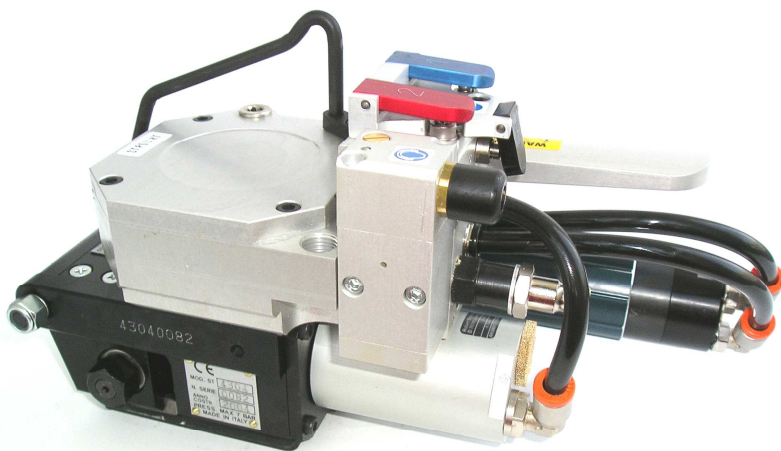

- **HIGH TENSION ON STRAP**
- **NEW LOCK TENSION STRAP**
- **ON REQUEST UPPER AIR CONNECTION CONFIGURATION**

- EASY AND FAST ADJUSTMENTS




**WELDING TIMER
ADJUSTMENT SCREW**

**LEVER 2— WELDING AND CUTTING (RED):
PUSH TO START WELDING AND CUTTING
CYCLE**

**LEVER 1—TENSION (BLUE):
HOLD IT PUSHED UNTIL THE
RIGHT TENSION VALUE**


**LEVER 3- RELEASE (BLACK):
HOLD IT PUSHED UNTIL THE
STRAP IS RELEASED**

**UNIVERSAL
SIZES REAR
GUIDE STRAP**

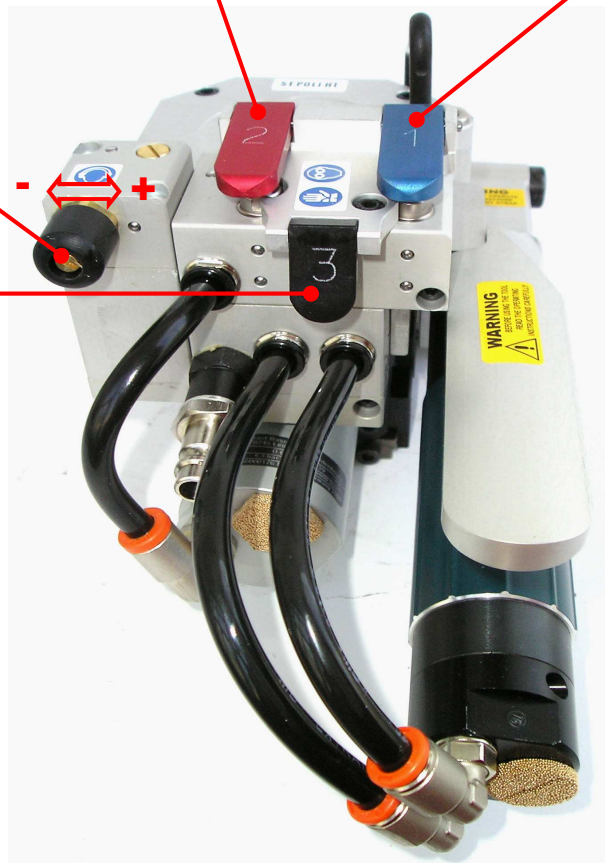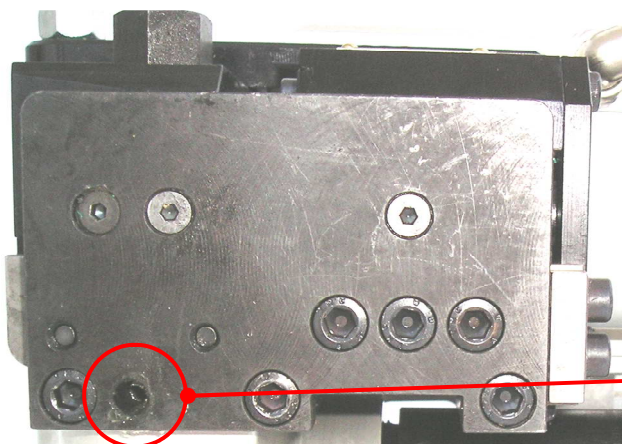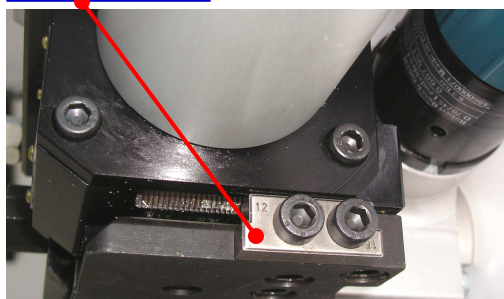

**TURN THIS SCREW TO ADJUST THE GAP BETWEEN
THE FEEDWHEEL AND LOCK STRAP PLATES**

**TURN THIS SCREW TO ADJUST THE MOTOR
POWER**

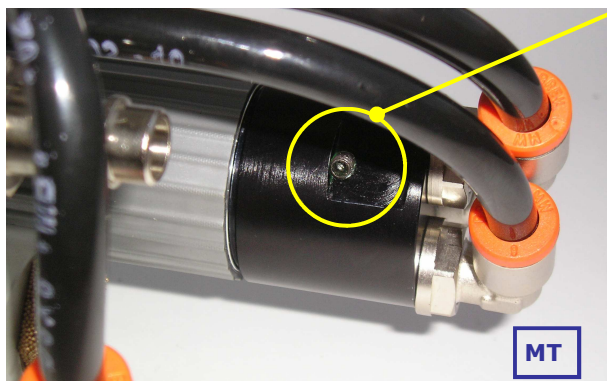


MT



HT

- CONFIGURATIONS ON REQUEST

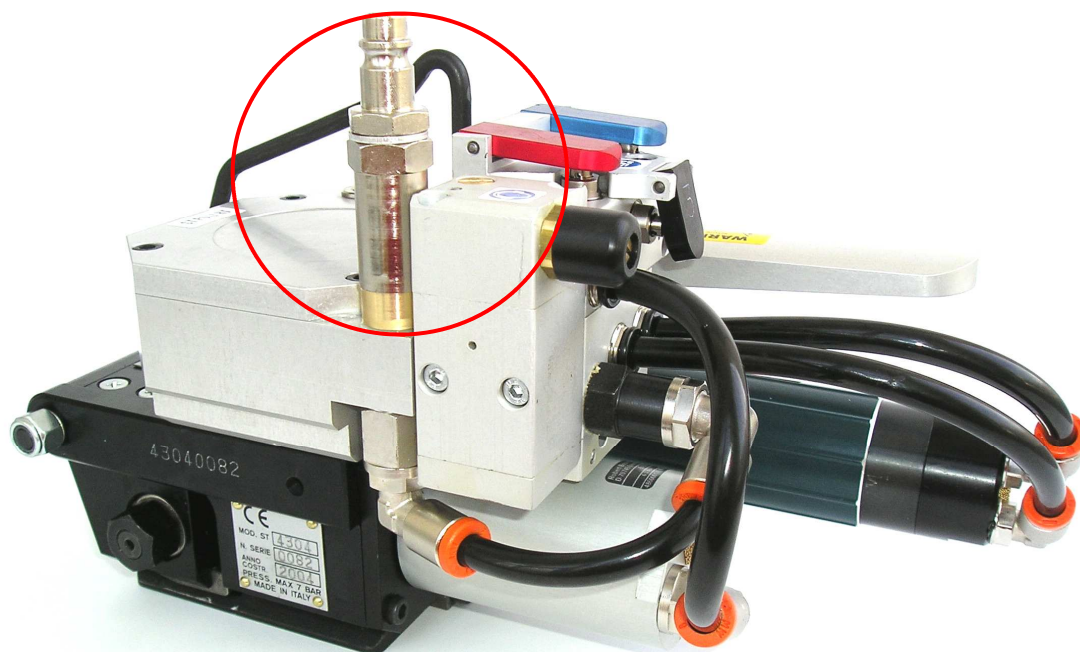

AN UPPER AIR CONNECTION IS AVAILABLE ON REQUEST THAT IS PARTICULARLY USEFUL WHEN USED WITH SPRING BALANCER – FOR POLI MT AND HT MODELS – IS NECESSARY INDICATE THIS OPTION ON THE ORDER



THE POLI MT CAN ALSO BE ORDERED WITH AN ADJUSTABLE CLUTCH SYSTEM CONFIGURATION - PARTICULARLY USEFUL TO HAVE UNIFORM TENSION ON STRAPS – IS NECESSARY INDICATE THIS OPTION ON THE ORDER


TURN THIS NUT TO ADJUST THE TENSION ON THE STRAP BY MECHANICAL CLUTCH

TYPICAL APPLICATIONS




1

I
S
T
R
E
A
P
T

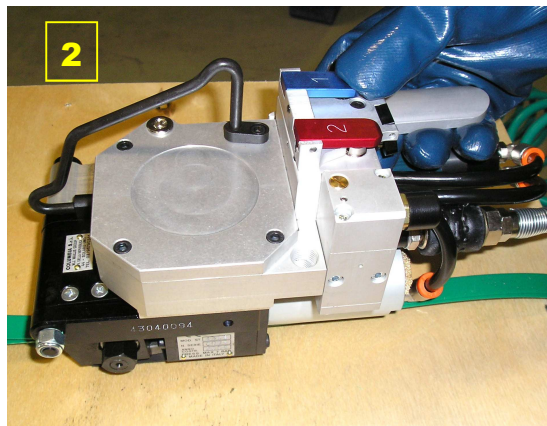


2

T
E
N
S
I
O
N

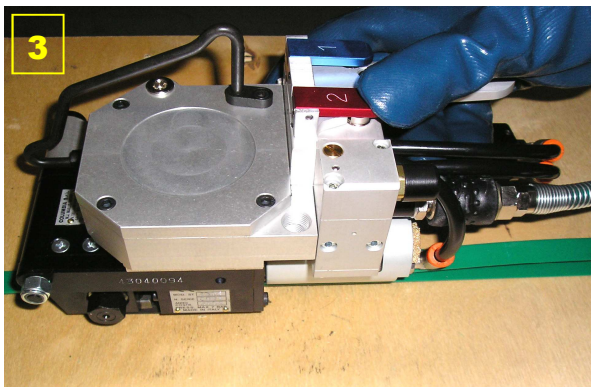


3

W
C
E
U
L
T
D
T
I
N
G

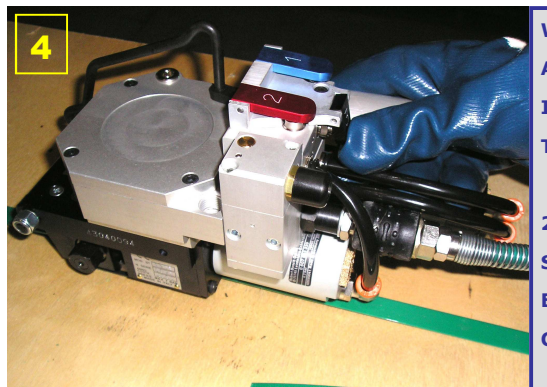

4


W
A
R
P
I
D
L
E
P
A
S
S
E
H
C

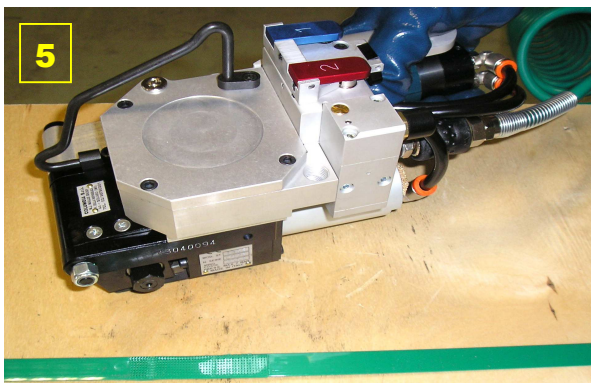

5

O
T
P
O
S
I
T
I
O
N
L
E

- * MECHANICAL INDUSTRIES
- * PROFILES, PIPES, EXTRUDES
- * PAPER AND CARTON INDUSTRIES
- * BRICKS
- * WOOD
- * STRAPPING FIBRE BALES USING PRESS SYSTEM
- * FOUNDRY

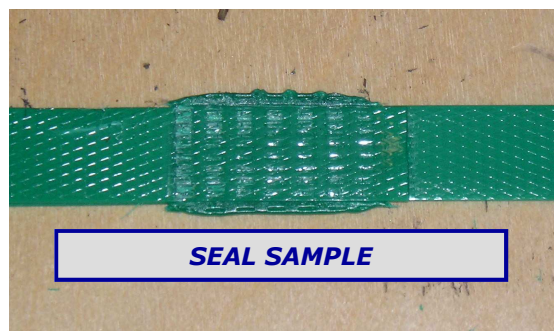

SEAL SAMPLE

ACCESSORIES

- **FILTER + LUBRIFICATOR + PRESSURE ADJ GROUP CODE 601.010.830**
- **SPIRAL LONG PIPE MT.15 WITH AIR CONNECTORS ON TIPS CODE 281.218.300**
- **BALANCER 3-6KG CODE 605.080.080**

OPTIONALS



- **SUSPENSION BRACKET KIT 3 POSITIONS CODE 291.030.500**



KIT SHORT BASE FOR ROUND PACKAGES:

(MINIMUM DIAMETER 500mm—20") (NEEDS REDUCED TENSION ON STRAP — ONLY FOR MT MODEL)

13mm CODE 280.017.400 - 16mm CODE 280.017.500 - 19mm CODE 280.017.600

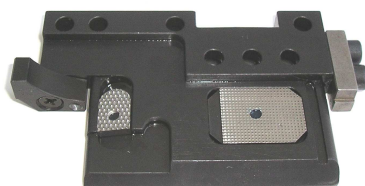

- **OPENING LEVER WITH VERTICAL AIR CONNECTION KIT—CODE 290.930.600**
(KIT ONLY AVAILABLE FOR TOOLS MADE BEFORE SEPTEMBER 2004)



ALL SPECIFICATIONS ARE CORRECT AT TIME OF PRINT, ARE FOR GUIDANCE PURPOSE ONLY AND SUBJECT TO CHANGE WITHOUT PRIOR NOTICE —09/04

SIAT S.p.A. Via Puecher, 22 - 22078 Turate (CO) Italy • Tel +39.02.964951 • Fax +39.02.9689727

www.siat.com • www.columbiatools.it • www.maillis.gr • siat@siat.com